


# TECHNICAL DATASHEET

New IPDU Series  
Intelligent PDU with SNMP  
16 Sockets DIN49440  
Input IEC C14, 10A



3L Surge Protector

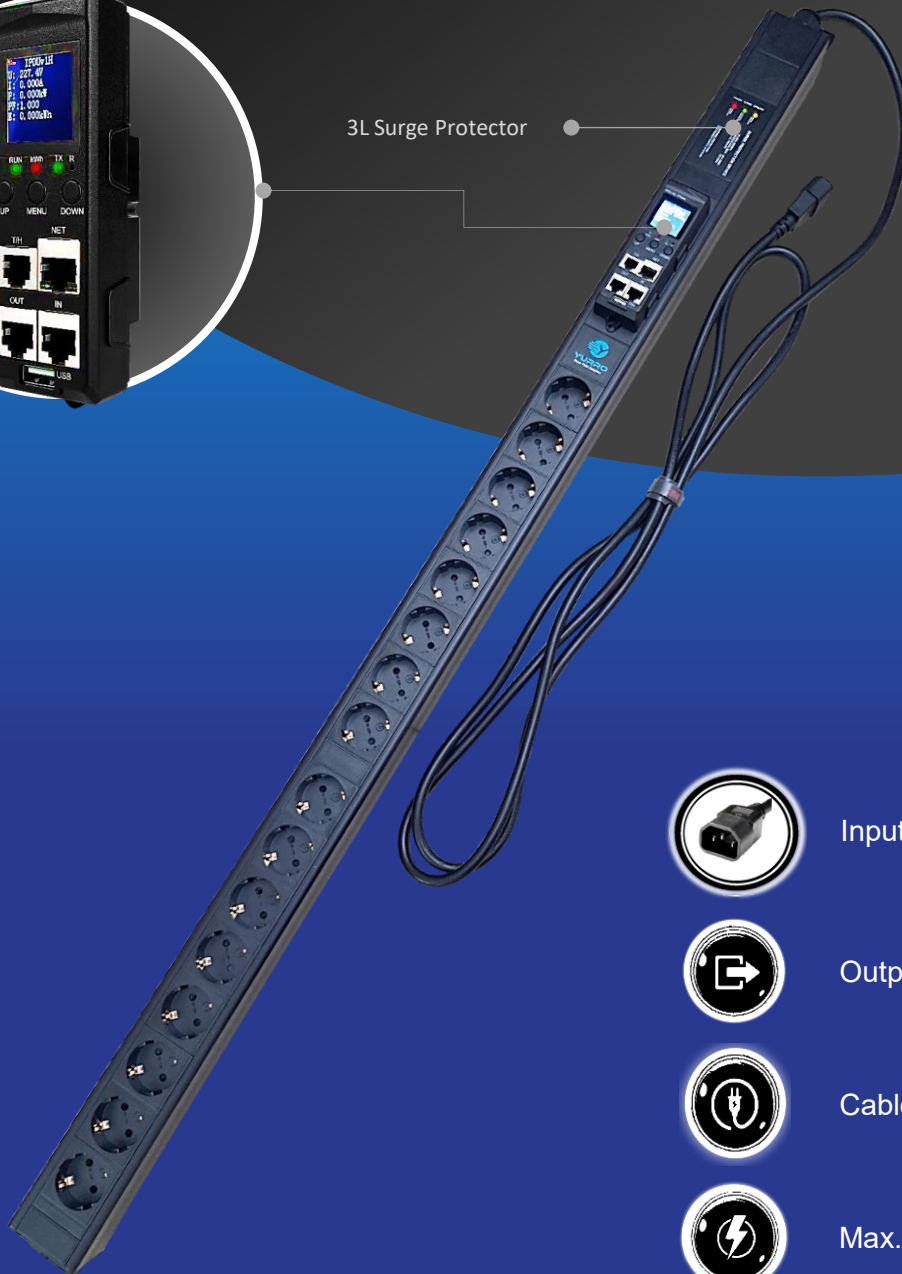

Input : IEC C14, 10A



Output : (16) DIN49440



Cable : 3G\*2.5mm<sup>2</sup>\*3m



Max. Power : 2500 Watt

<b>Specification</b>	
<b>Brand</b>	YURRO
<b>Product Name</b>	Power Distribution Unit
<b>Part Number</b>	Y-A16-12-2
<b>Physical</b>	
Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1328 x 50 x 60mm
Mounting Length	1289mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw ( φ 6 x 16mm), 4pcs M6 float nut
<b>Output</b>	
Socket Type	DIN49440 / Schuko
Socket Unit	16 x DIN49440 / Schuko
Max. Ouput Current	16A
<b>Input</b>	
Cable with Plug	IEC C14, 10A
Cable Spesification	3G*2.5mm <sup>2</sup> *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	10A
Max. Current	10A
Max. Power	2500 watt
<b>Protection Function</b>	
3LSP	3Lights Surge Protector
<b>Feature</b>	
New IPDU Meter	<ul style="list-style-type: none"> <li>. Remote network management</li> <li>. Cascadae management</li> <li>. RS485</li> <li>. SNMP V1, V2, V3</li> <li>. Monitor input voltage</li> <li>. Monitor total load current</li> <li>. Monitor total load power</li> <li>. Monitor energy consumption</li> <li>. Monitor power facktor</li> <li>. Monitor output options</li> <li>. Voltage threshold setting</li> <li>. Current threshold setting</li> <li>. TH Sensor ( optional )</li> <li>. USB port</li> </ul>
<b>Add-In</b>	
Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE
<b>Warranty</b>	
2 ( two ) Years	Repair or replace