


TECHNICAL DATASHEET

New IPDU Series
Intelligent PDU with SNMP
18 Sockets DIN49440
Input Ceeform 3P+N+E, 32A



Input :
Ceeform 3P+N+E, 32A

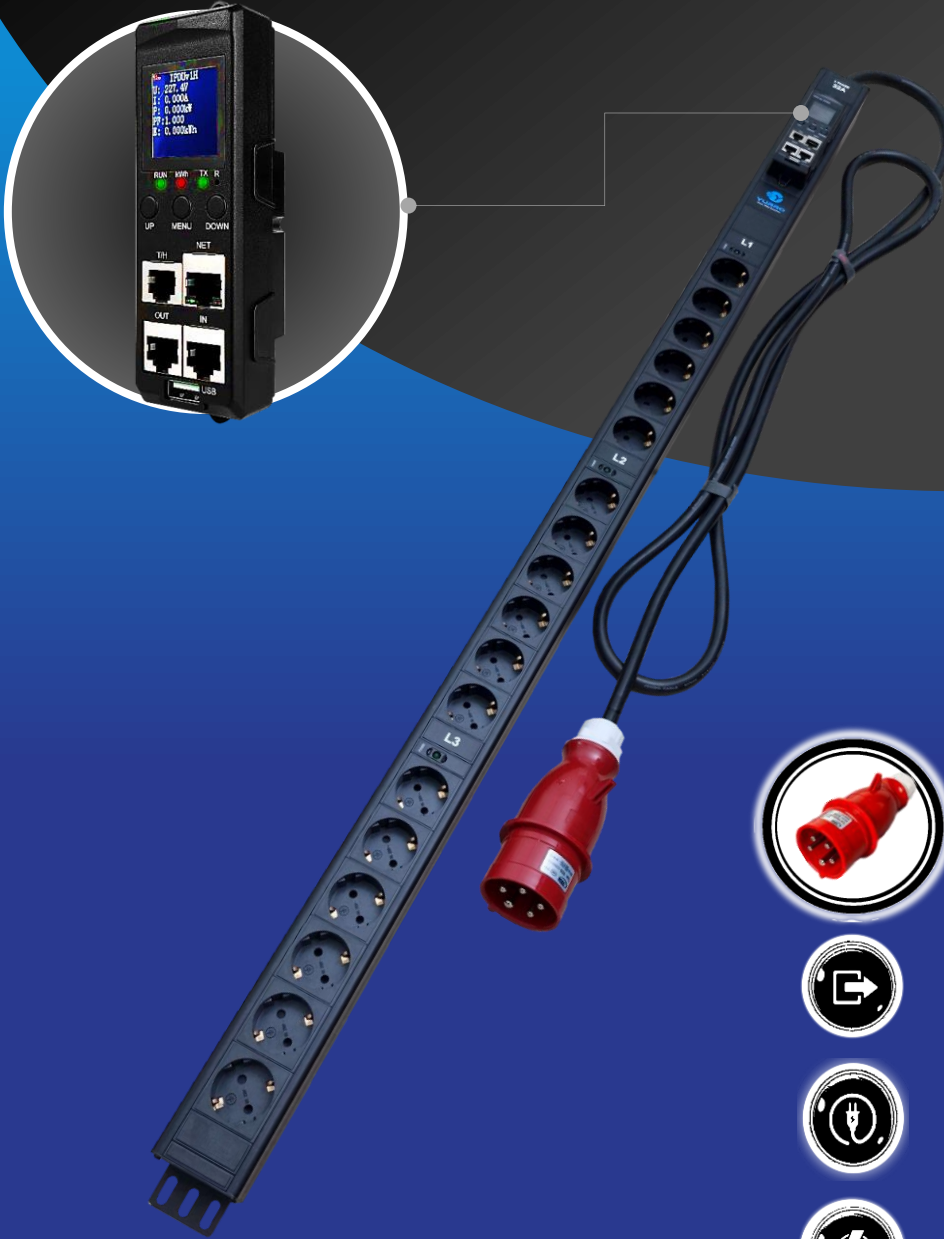

Output : (18) DIN49440



Cable : 5G*6.0mm²*3m



Max. Power : 21 k.watt

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-A18-12-5.3P

Physical

Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1328 x 50 x 60mm
Mounting Length	1289mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	DIN49440 / Schuko
Socket Unit	18 x DIN49440 / Schuko
Max. Ouput Current	16A

Input

Cable with Plug	IEC60309 3P+N+E, 32A
Cable Spesification	5G*6.0mm ² *3M
Rating Voltage	380 - 415VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	21 Kw

Feature

New IPDU Meter	. Remote network management	. Monitor energy consumption
	. Cascadae management	. Monitor power factkor
	. RS485	. Monitor output options
	. SNMP V1, V2, V3	. Voltage threshold setting
	. Monitor input voltage	. Current threshold setting
	. Monitor total load current	. TH Sensor (optional)
	. Monitor total load power	. USB port

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
---------------	-------------------