


TECHNICAL DATASHEET

New IPDU Series
Intelligent PDU with SNMP
20 Sockets DIN49440
Input Ceeform 16A



● 3L Surge Protector

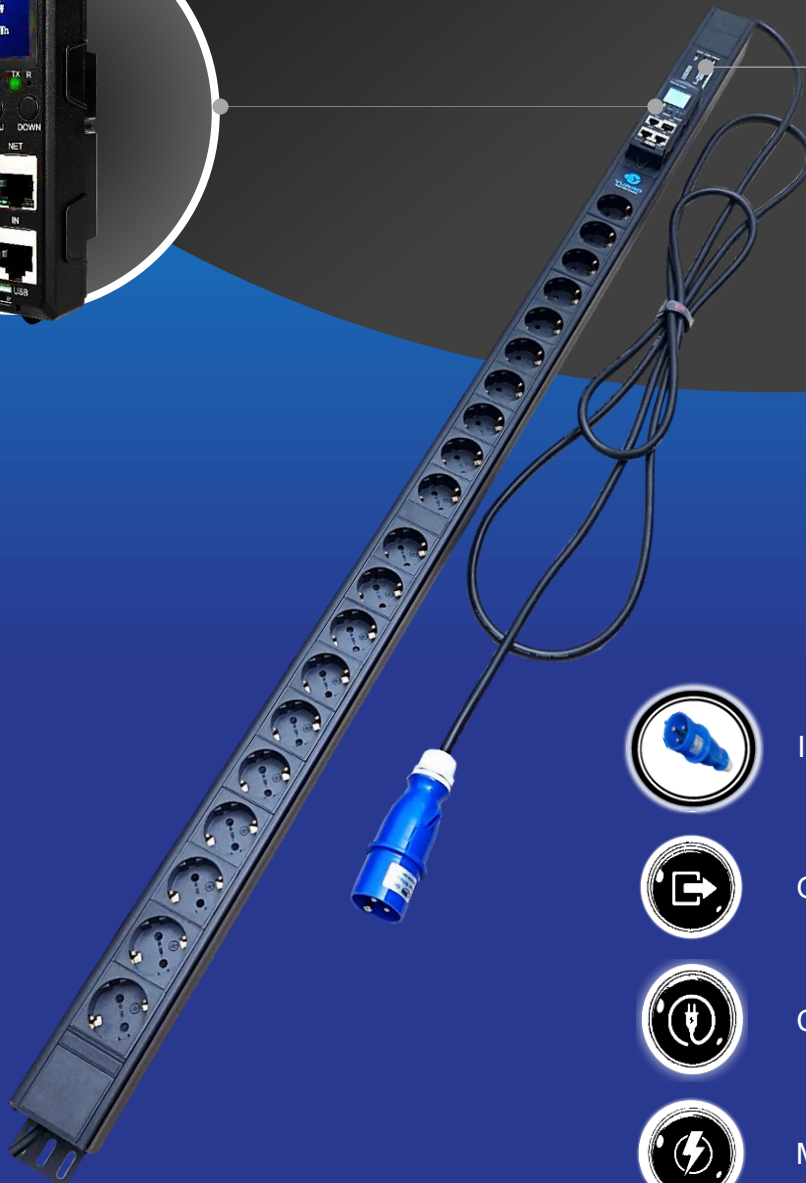

Input : Ceeform 16A



Output : (20) DIN49440



Cable : 3G*2.5mm²*3m



Max. Power : 4000 Watt

Specification	
Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-A20-12-4
Physical	
Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1428 x 50 x 60mm
Mounting Length	1389mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (φ 6 x 16mm), 4pcs M6 float nut
Output	
Socket Type	DIN49440 / Schuko
Socket Unit	20 x DIN49440 / Schuko
Max. Ouput Current	16A
Input	
Cable with Plug	Ceeform 16A
Cable Spesification	3G*2.5mm ² *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	16A
Max. Current	16A
Max. Power	4000 watt
Protection Function	
3LSP	3Lights Surge Protector
Feature	
New IPDU Meter	<ul style="list-style-type: none"> . Remote network management . Cascadae management . RS485 . SNMP V1, V2, V3 . Monitor input voltage . Monitor total load current . Monitor total load power
	<ul style="list-style-type: none"> . Monitor energy consumption . Monitor power factkor . Monitor output options . Voltage threshold setting . Current threshold setting . TH Sensor (optional) . USB port
Add-In	
Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE
Warranty	
2 (two) Years	Repair or replace