


TECHNICAL DATASHEET

New IPDU Series
Intelligent PDU with SNMP
24 Sockets DIN49440
Input Ceeform 3P+N+E, 32A



Input :
Ceeform 3P+N+E, 32A

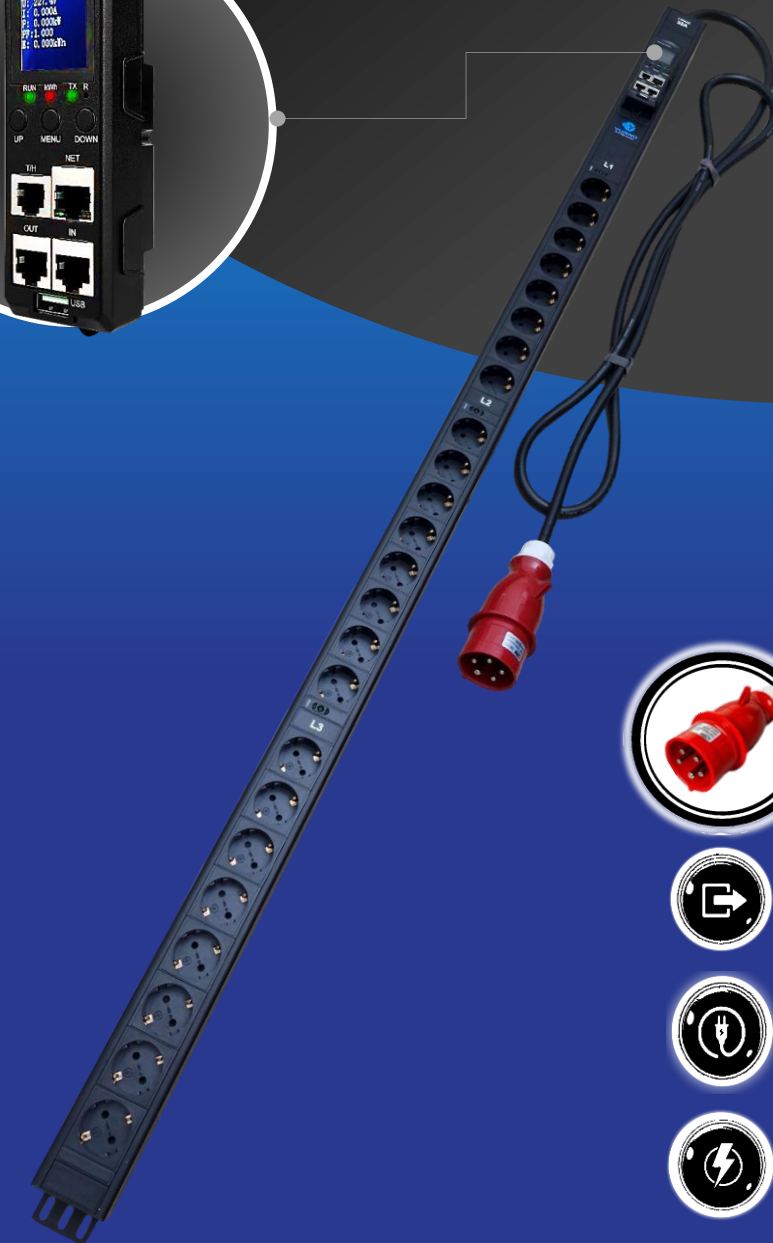

Output : (24) DIN49440



Cable : 5G*6.0mm²*3m



Max. Power : 21 k.watt

Specification		
Brand	YURRO	
Product Name	Power Distribution Unit	
Part Number	Y-A24-12-5.3P	
Physical		
Case	Aluminium alloy coated Black	
Power Input	Top singel input	
Bracket Install	Vertical installation	
Product Size	L x W x H = 1578 x 50 x 60mm	
Mounting Length	1539mm	
Mounting Style	2 ends Brakets	
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut	
Output		
Socket Type	DIN49440 / Schuko	
Socket Unit	24 x DIN49440 / Schuko	
Max. Ouput Current	16A	
Input		
Cable with Plug	IEC60309 3P+N+E, 32A	
Cable Spesification	5G*6.0mm ² *3M	
Rating Voltage	380 - 415VAC 50 - 60 Hz	
Rating Current	32A	
Max. Current	32A	
Max. Power	21 Kw	
Feature		
New IPDU Meter	. Remote network management . Cascadae management . RS485 . SNMP V1, V2, V3 . Monitor input voltage . Monitor total load current . Monitor total load power . Monitor energy consumption . Monitor power factkor . Monitor output options . Voltage threshold setting . Current threshold setting . TH Sensor (optional) . USB port	
Add-In		
Interior Connection Wire	Brass bar	
Interior Connection Style	Soldering tin	
Fix the Cable	PG Cable clamp	
Safety Authentication	CE	
Warranty		
2 (two) Years	Repair or replace	