

# TECHNICAL DATASHEET

**PDU 12 Sockets IEC C13  
with Power Indicator  
Input Schuko, 16A**



Input : Schuko, 16A




Output : (12) IEC C13



Cable : 3G\*1.5 mm<sup>2</sup>\*3m



Max. Power : 4000 Watt

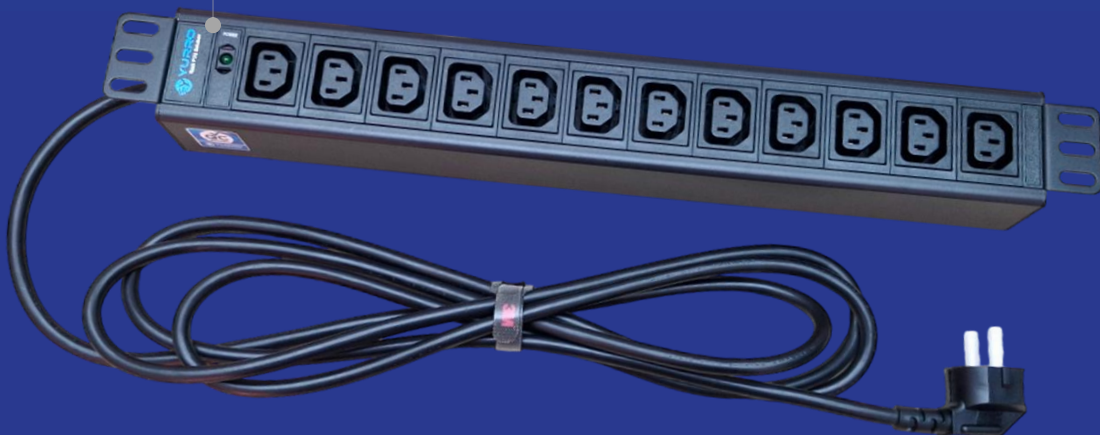

| <b>Specification</b>      |  |
|---------------------------|--|
| Brand                     | YURRO  |
| Product Name              | Power Distribution Unit                            |
| Part Number               | Y-B12-0-1  |
| <b>Physical</b>           |  |
| Case                      | Aluminium alloy coated Black                       |
| Power Input               | Left single input                                  |
| Bracket Install           | 19inch Horizontal installation                     |
| Product Size              | L x W x H = 482.6 x 44.5 x 62mm                    |
| Mounting Length           | 459.6 mm   |
| Mounting Style            | 2 ends Brackets                                    |
| Fittings                  | 4 pcs cross screw ( φ 6 x 16mm), 4pcs M6 float nut |
| <b>Output</b>             |  |
| Socket Type               | IEC C13  |
| Socket Unit               | 12 x IEC C13                                       |
| Max. Output Current       | 15A  |
| <b>Input</b>              |  |
| Cable with Plug           | Schuko, 16A  |
| Cable Specification       | 3G*1.5mm <sup>2</sup> *3M                          |
| Rating Voltage            | 220 - 250VAC 50 - 60 Hz                            |
| Rating Current            | 16A  |
| Max. Current              | 16A  |
| Max. Power                | 4000 watt  |
| <b>Control Function</b>   |  |
| LED                       | Power Indicator                                    |
| <b>Add-In</b>             |  |
| Interior Connection Wire  | Brass bar  |
| Interior Connection Style | Soldering tin                                      |
| Fix the Cable             | PG Cable clamp                                     |
| Safety Authentication     | CE   |
| <b>Warranty</b>           |  |
| 2 ( two ) Years           | Repair or replace                                  |