


TECHNICAL DATASHEET

**28 Holes Mix. Socket
Intelligent PDU with RS-485
(24) IEC C13 + (4) IEC C19
Input Ceeform 32A**

3L Surge Protector

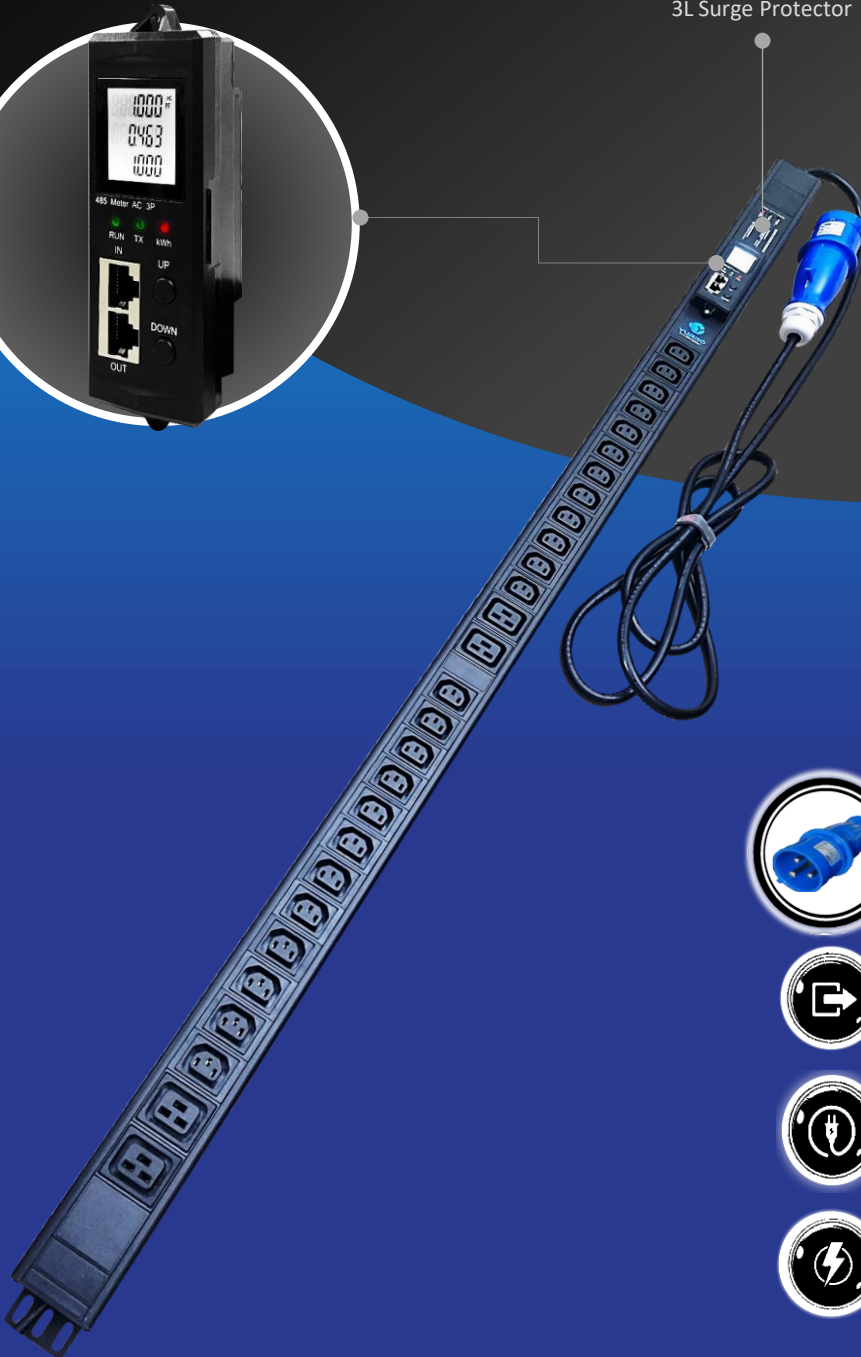

Input : Ceeform 32A



Output : (24) IEC C13
(4) IEC C19



Cable : 3G*6.0mm²*3m



Max. Power : 8000 Watt

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-B24C4-11-5

Physical

Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1428 x 50 x 60mm
Mounting Length	1389mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	IEC C13 and IEC C19
Socket Unit	(24)C13 + (4)C19

Input

Cable with Plug	Ceeform, 32A
Cable Spesification	3G*6.0mm ² *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	8000 watt

Protection Function

3LSP	3Lights Surge Protector
------	-------------------------

Feature

SIPDU Meter	. RS-485	. Monitor power factor
	. Monitor input voltage	. Monitor output option
	. Monitor total load current	. Voltage threshold setting
	. Monitor energy consumption	. Current threshold setting

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
-----------------	-------------------