


TECHNICAL DATASHEET

**28 Holes PDU Mix. Socket
(24) IEC C13 + (4) IEC C19
With 3L Surge Protector + AV6 Meter
Input Ceeform 32A**



3L Surge Protector

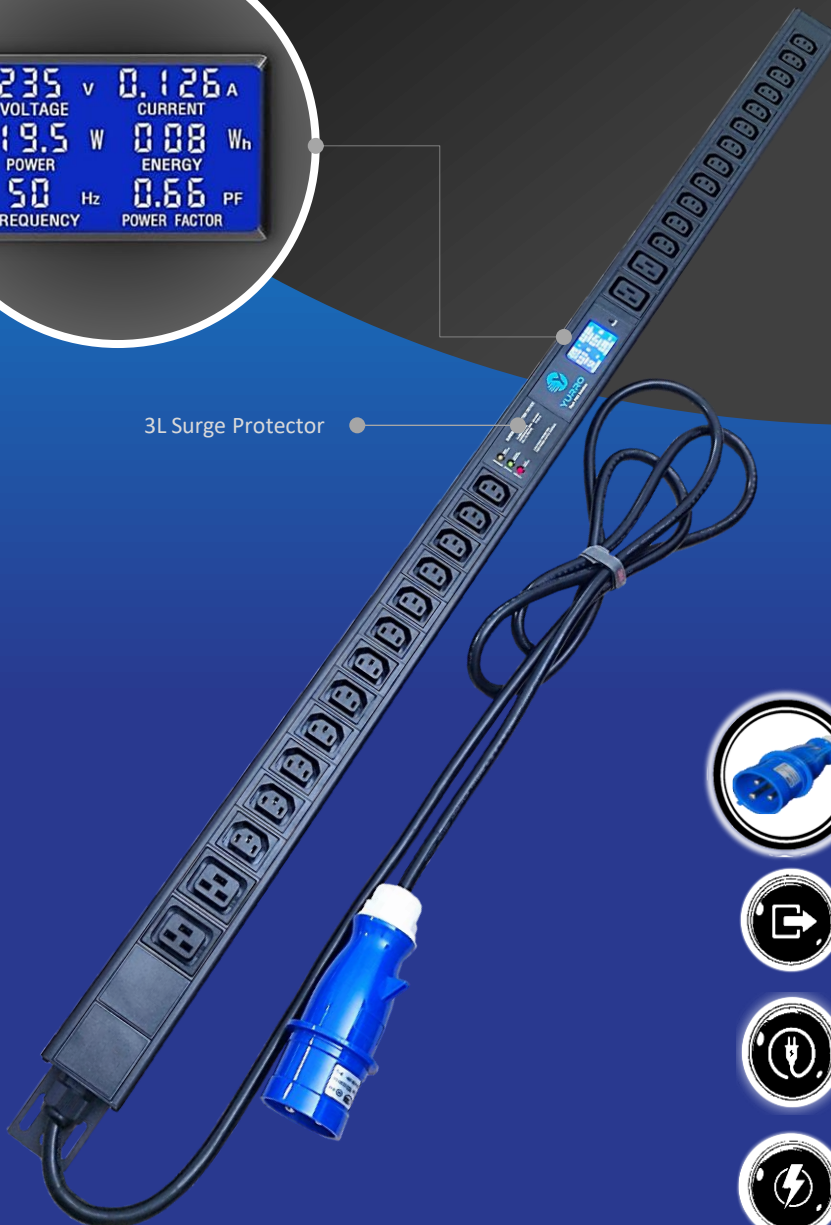

Input : Ceeform 32A



Output : (24) IEC C13
(4) IEC C19



Cable : 3G*4.0mm²*3m



Max. Power : 8000 Watt

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-B24C4-6-5

Physical

Case	Aluminium alloy coated Black
Power Input	Bottom singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1428 x 50 x 60mm
Mounting Length	1389mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	IEC C13 and IEC C19
Socket Unit	(24)C13 + (4)C19

Input

Cable with Plug	Ceeform, 32A
Cable Spesification	3G*6.0mm ² *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	8000 watt

Protection Function

3LSP	3Lights Surge Protector
------	-------------------------

Control Function

AV6	. Monitor input voltage . Monitor power factor . Monitor frequency . Monitor total load power	. Monitor total load current . Monitor energy consumption . Button reset energy
-----	--	---

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
-----------------	-------------------