


# TECHNICAL DATASHEET

**36 Holes Mix. Socket  
Intelligent PDU with RS-485  
(30) IEC C13 + (6) IEC C19  
Input Ceeform 32A**

3L Surge Protector

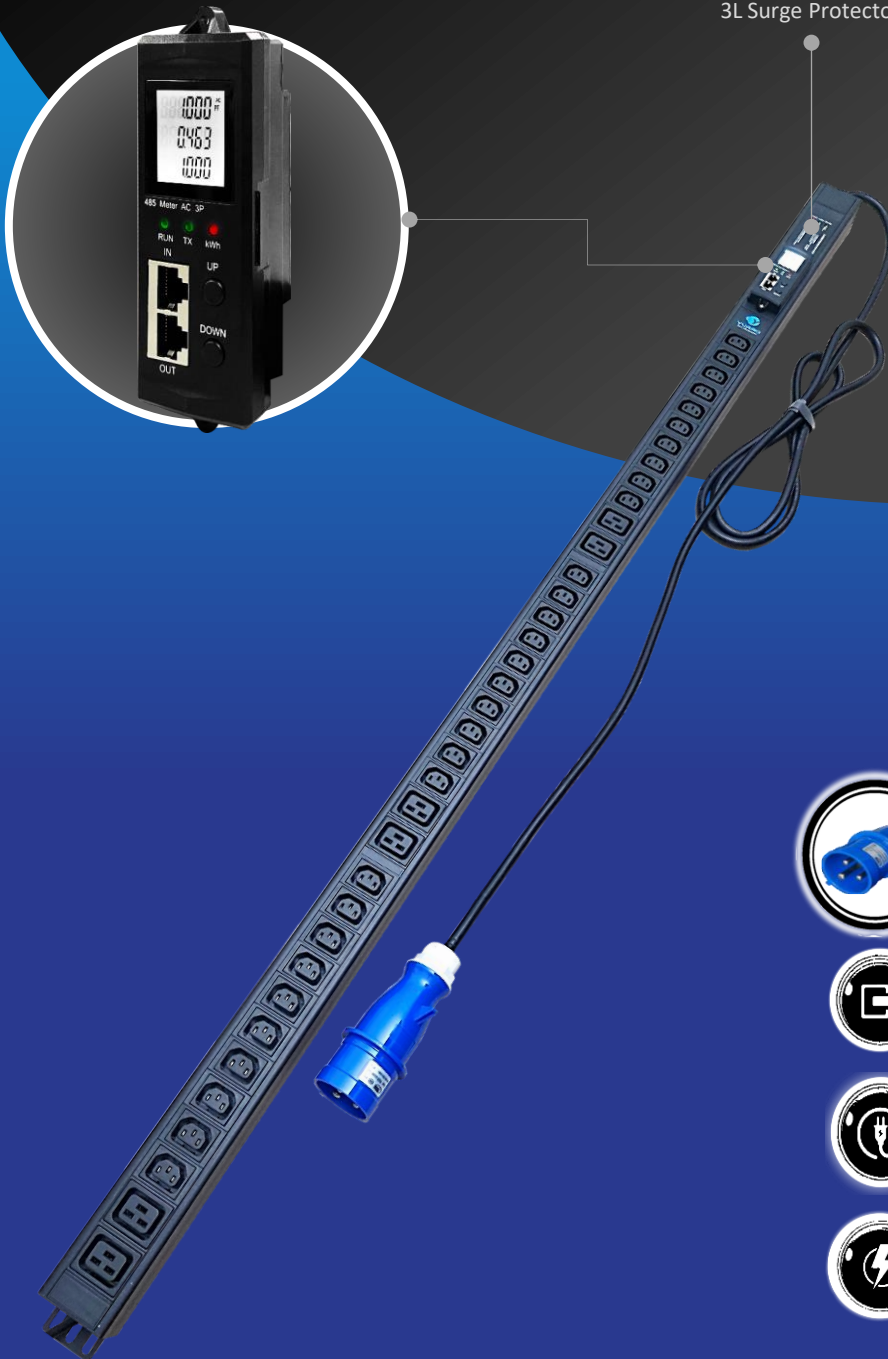

Input : Ceeform 32A



Output : (30) IEC C13  
(6) IEC C19



Cable : 3G\*6.0mm<sup>2</sup>\*3m



Max. Power : 8000 Watt

<b>Specification</b>	
<b>Brand</b>	YURRO
<b>Product Name</b>	Power Distribution Unit
<b>Part Number</b>	Y-B30C6-11-5
<b>Physical</b>	
Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1728 x 50 x 60mm
Mounting Length	1689mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw ( $\phi$ 6 x 16mm), 4pcs M6 float nut
<b>Output</b>	
Socket Type	IEC C13 and IEC C19
Socket Unit	(30)C13 + (6)C19
<b>Input</b>	
Cable with Plug	Ceeform, 32A
Cable Spesification	3G*6.0mm <sup>2</sup> *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	8000 watt
<b>Protection Function</b>	
3LSP	3Lights Surge Protector
<b>Feature</b>	
SIPDU Meter	<ul style="list-style-type: none"> <li>. RS-485</li> <li>. Monitor power factor</li> <li>. Monitor input voltage</li> <li>. Monitor output option</li> <li>. Monitor total load current</li> <li>. Voltage threshold setting</li> <li>. Monitor energy consumption</li> <li>. Current threshold setting</li> </ul>
<b>Add-In</b>	
Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE
<b>Warranty</b>	
2 ( two ) Years	Repair or replace