


# TECHNICAL DATASHEET

SIPDU Series  
Intelligent PDU with RS-485  
36 Sockets IEC C13  
6 Input Ceeform 32A



● 3L Surge Protector

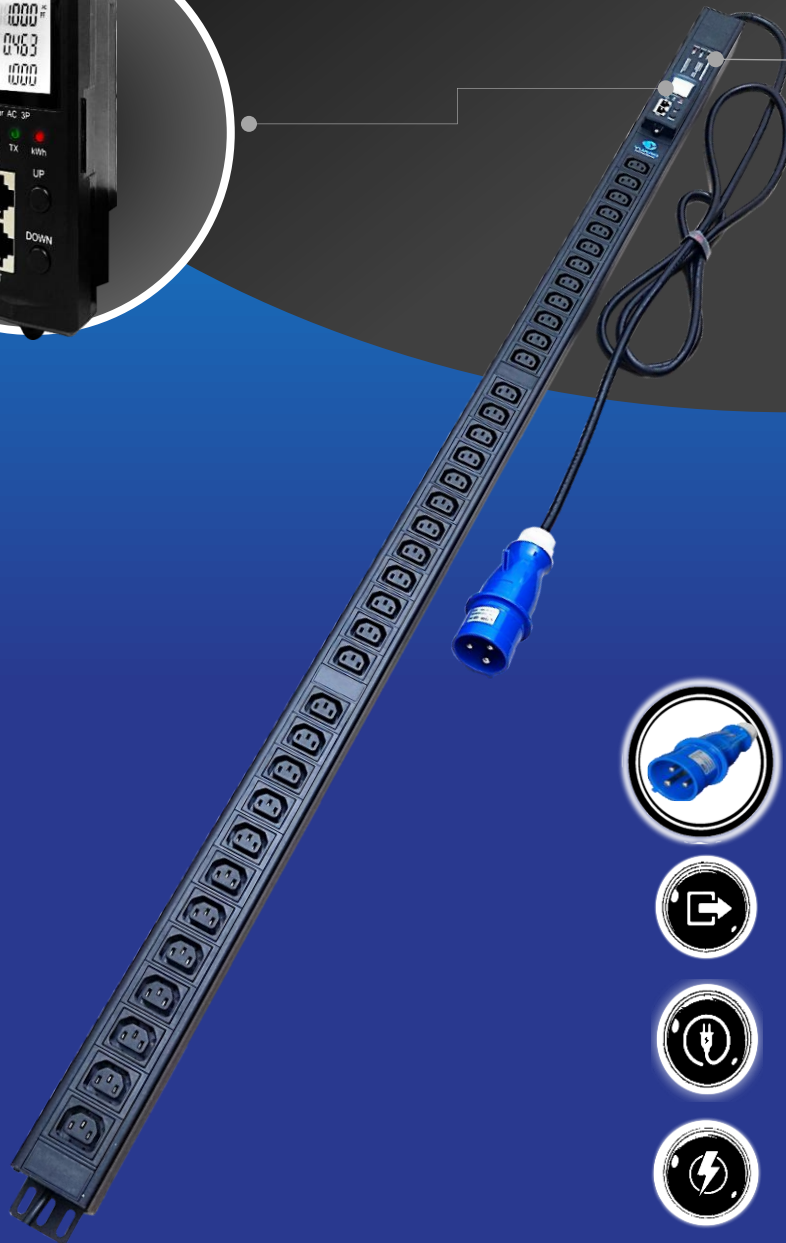

Input : Ceeform 32A



Output : (36) IEC C13



Cable : 3G\*6.0mm<sup>2</sup>\*3m



Max. Power : 8000 Watt

**Specification**

<b>Brand</b>	<b>YURRO</b>
<b>Product Name</b>	<b>Power Distribution Unit</b>
<b>Part Number</b>	<b>Y-B36-11-5</b>

**Physical**

Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1728 x 50 x 60mm
Mounting Length	1689mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw ( φ 6 x 16mm), 4pcs M6 float nut

**Output**

Socket Type	IEC C13
Socket Unit	36 x IEC C13
Max. Ouput Current	15A

**Input**

Cable with Plug	Ceeform 32A
Cable Spesification	3G*6.0mm <sup>2</sup> *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	8000 watt

**Protection Function**

3LSP	3Lights Surge Protector
------	-------------------------

**Feature**

SIPDU Meter	. RS-485	. Monitor power factor
	. Monitor input voltage	. Monitor output option
	. Monitor total load current	. Voltage threshold setting
	. Monitor energy consumption	. Current threshold setting

**Add-In**

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

**Warranty**

2 ( two ) Years	Repair or replace
-----------------	-------------------