


TECHNICAL DATASHEET

**14 Holes PDU Mix. Socket
(6) DIN49440 + (8) IEC C13
With 3L Surge Protector + AV6 Meter
Input IEC C14, 10A**



3L Surge Protector

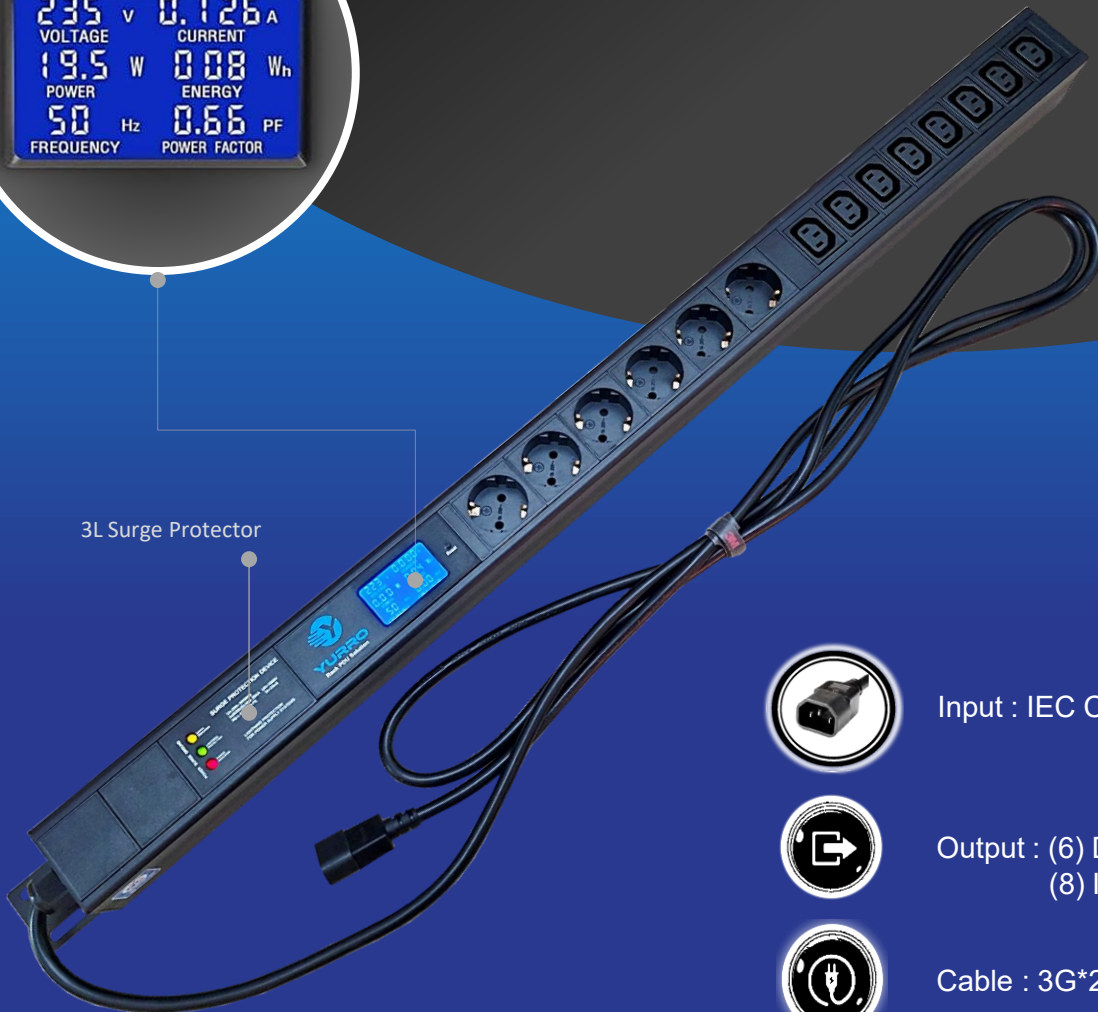

Input : IEC C14, 10A



Output : (6) DIN49440
(8) IEC C13



Cable : 3G*2.5mm²*3m



Max. Power : 2500 Watt

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-A6B8-6-2

Physical

Case	Aluminium alloy coated Black
Power Input	Bottom singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 928 x 50 x 60mm
Mounting Length	889mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	DIN49440 and IEC C13
Socket Unit	(6)DIN49440 + (8)C13

Input

Cable with Plug	IEC C14, 10A
Cable Spesification	3G*2.5mm ² *3M
Rating Voltage	220 - 250VAC 50 - 60 Hz
Rating Current	10A
Max. Current	10A
Max. Power	2500 watt

Protection Function

3LSP	3Lights Surge Protector
------	-------------------------

Control Function

AV6	<ul style="list-style-type: none"> . Monitor input voltage . Monitor power factor . Monitor frequency . Monitor total load power . Monitor total load current . Monitor energy consumption . Button reset energy
-----	---

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
-----------------	-------------------