


# TECHNICAL DATASHEET

**3 Phase PDU 32A**  
**30 Holes Mix. Socket**  
**(24) IEC C13 + (6) IEC C19**  
**With AV2 Meter**  
**Input Ceeform 3P+N+E, 32A**



Input :  
Ceeform 3P+N+E, 32A

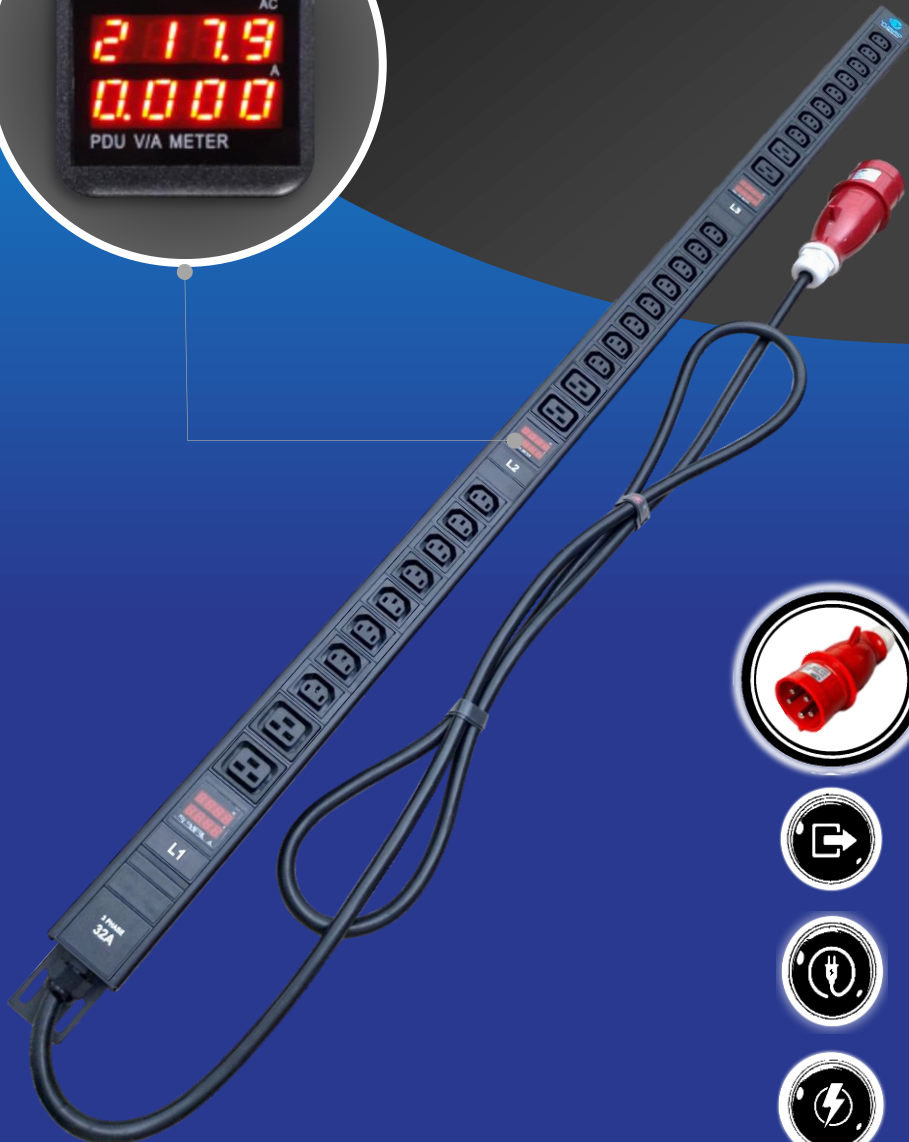

Output : (24) IEC C13  
(6) IEC C19



Cable : 5G\*6.0mm<sup>2</sup>\*3m



Max. Power : 21 k.watt

**Specification**

<b>Brand</b>	<b>YURRO</b>
<b>Product Name</b>	<b>Power Distribution Unit</b>
<b>Part Number</b>	<b>Y-B24C6-4-5.3P</b>

**Physical**

Case	Aluminium alloy coated Black
Power Input	Bottom singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1428 x 50 x 60mm
Mounting Length	1389mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw ( $\phi$ 6 x 16mm), 4pcs M6 float nut

**Output**

Socket Type	IEC C13 and IEC C19
Socket Unit	(24) IEC C13 + (6) IEC C19

**Input**

Cable with Plug	IEC60309 3P+N+E, 32A
Cable Spesification	5G*6.0mm <sup>2</sup> *3M
Rating Voltage	380 - 415VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	21 Kw

**Control Function**

AV2 Meter	3ea Volt, Ampere Meter
-----------	------------------------

**Add-In**

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

**Warranty**

2 (two) Years	Repair or replace
---------------	-------------------