


TECHNICAL DATASHEET

3 Phase PDU 32A
24 Holes Mix. Socket
(18)IEC C13 + (6)IEC C19
With Ammeter Y-Series
Input Ceeform 3P+N+E, 32A



Input :
Ceeform 3P+N+E, 32A

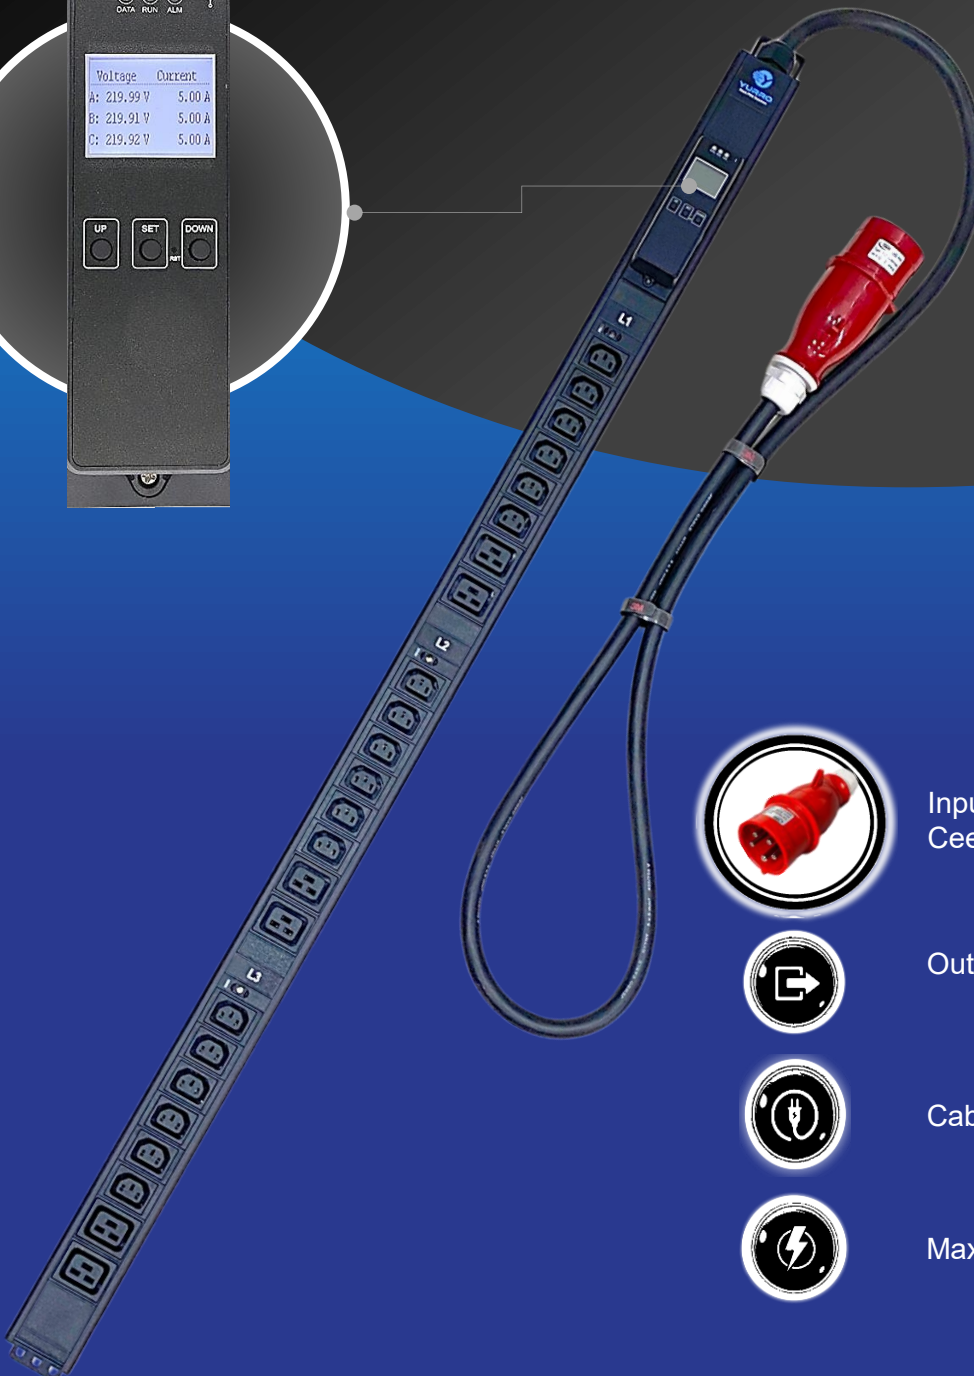

Output : (18) IEC C13
(6) IEC C19



Cable : 5G*6.0mm²*5m



Max. Power : 21 k.watt

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-B18C6-7-5.3P

Physical

Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1328 x 50 x 60mm
Mounting Length	1289mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	Mix. IEC C13 and IEC C19
Socket Unit	18 x IEC C13 + 6 x IEC C19

Input

Cable with Plug	IEC60309 3P+N+E, 32A
Cable Spesification	5G*6.0mm ² *3M
Rating Voltage	380 - 415VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	21 Kw

Feature

LED	3ea Power Indicator
Ammeter Y-Series	. Monitor input voltage (V) . Monitor total load current (A) . Monitor energy consumption (Kwh) . Monitor power factor

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
---------------	-------------------