


TECHNICAL DATASHEET

3 Phase PDU 32A
24 Sockets IEC C13
With Ammeter Y-Series
Input Ceeform 3P+N+E, 32A



Max. Power : 21 Kw

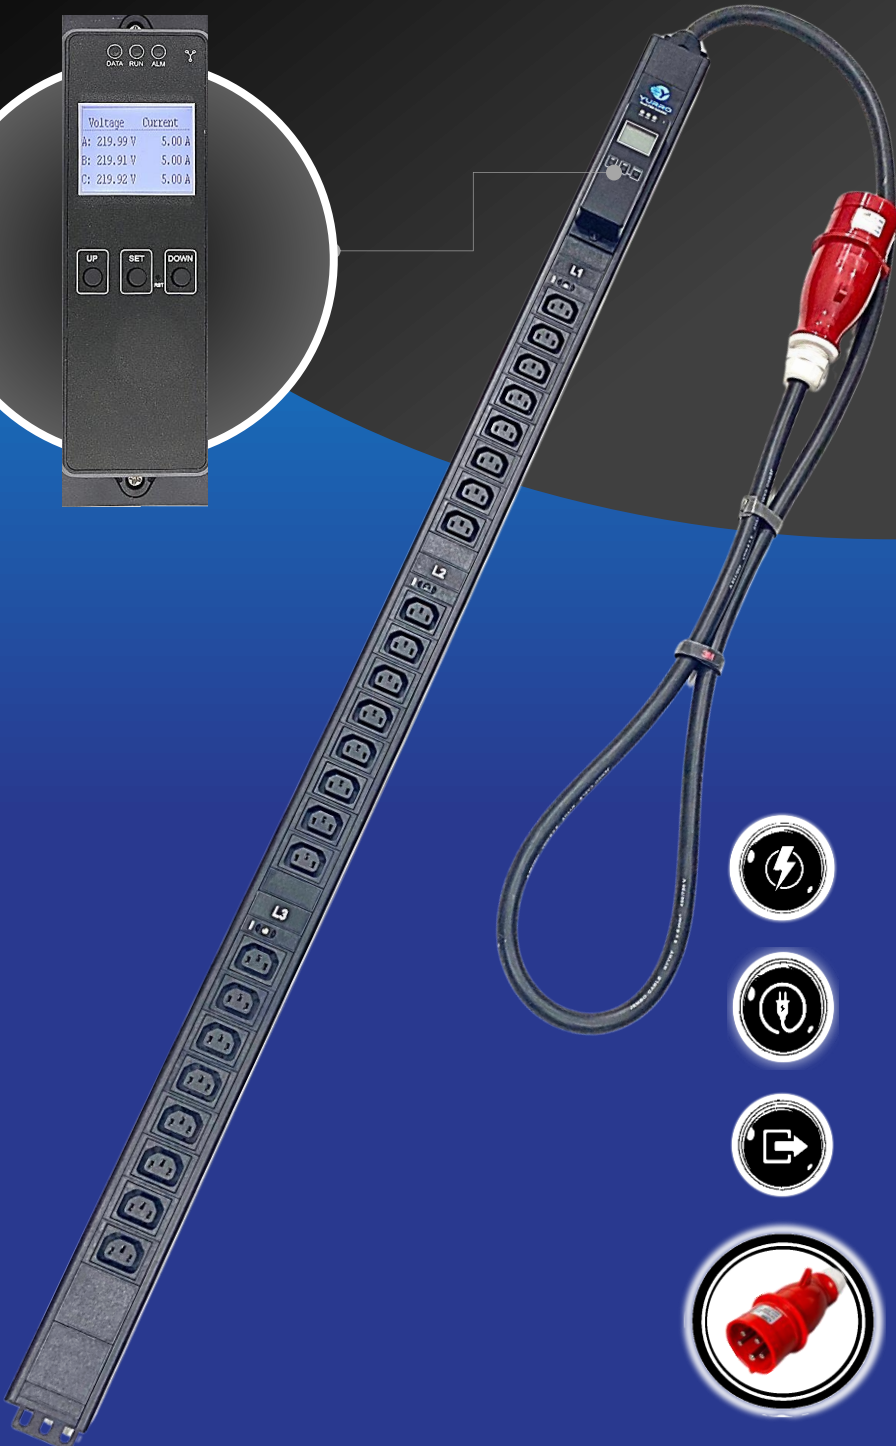

Cable : 5G*6.0mm²*5m



Output : (24) IEC C13



Input :
Ceeform 3P+N+E, 32A

Specification

Brand	YURRO
Product Name	Power Distribution Unit
Part Number	Y-B24-7-5.3P

Physical

Case	Aluminium alloy coated Black
Power Input	Top singel input
Bracket Install	Vertical installation
Product Size	L x W x H = 1328 x 50 x 60mm
Mounting Length	1289mm
Mounting Style	2 ends Brakets
Fittings	4 pcs cross screw (ϕ 6 x 16mm), 4pcs M6 float nut

Output

Socket Type	IEC C13
Socket Unit	24 x IEC C13
Max. Output Current	15A

Input

Cable with Plug	IEC60309 3P+N+E, 32A
Cable Spesification	5G*6.0mm ² *5M
Rating Voltage	380 - 415VAC 50 - 60 Hz
Rating Current	32A
Max. Current	32A
Max. Power	21 Kw

Control Function

LED	3ea Power Indicator
Ammeter Y-Series	Monitor Volt (V)
	Monitor Ampere (A)
	Monitor Energy Consumption (Kwh)
	Monitor Power Factor

Add-In

Interior Connection Wire	Brass bar
Interior Connection Style	Soldering tin
Fix the Cable	PG Cable clamp
Safety Authentication	CE

Warranty

2 (two) Years	Repair or replace
---------------	-------------------